



SWLFP-121000(12.8V100Ah)



SW lithium series batteries provide superior performance, capacities and reliability. Using state of high power cell technology, the lithium series is designed for environmentally sensitive areas that require enhanced cycle life capabilities in commercial.

SW lithium batteries are widely used in industrial, residential, commercial and private applications. The maintenance free construction and advanced design features makes the lithium series the definitive choice for a wide variety of markets. Like solar and renewable energy storage, electric vehicle, golf cart and industrial equipment, floor machines, forklifts, aerial lifts, and robotics; marine, RV, and no-idle solution; Mobility and Medical Equipment; Telecom, Broadband and Cable TV; UPS systems.

Applications



BATTERY SPECIFICATIONS

Battery type-Chemistry	LiFePO4	Voltage Window	10.8-14.4V
Nominal Voltage	12.8V	Recommend Charge Voltage	14V
Nominal Capacity	100Ah	Max Charge Voltage	14.6V
Energy Density	1280Wh	Recommend Charge Current	20A
Dimensions(LxWxH)	330*171*215mm	Max Continuous Current	100A
Weight	10 KGS	Recommend Discharge Voltage	11.2V
Terminal Type	T16	Max Discharging Voltage	10.8V
Terminal Torque	8.5NM	Max Continuous Discharge Current	100A
Case Material	ABS	Peak Discharge Current	200A/3S
BMS build-in	Yes	Cycle Life(0.2C, 25°C@80% DOD)	6000 Cycles
AH Efficiency – round trip	>98%	Discharge Temperature	(- 20 to 55)°C
Self Discharge per Month	<3%	Charge Temperature	(0 to 55)°C
Max in Parallel	4PCS	Storage Temperature	(- 20 to 45)°C
Max in Series	4PCS	Heating Function	Optional
LCD Screen	Optional	Bluetooth(App)	Optional

BMS CHARACTERISTICS

Primary Charging Protection	Current :105A	Delay Time: 20s
Second Charging Protection	Current :200A	Delay Time: 2~3s
Primary Discharging Protection	Current :110A	Delay Time: 30s
Second Discharging Protection	Current :200A	Delay Time: 2~3s
Over Charge Voltage Protection	Voltage :14.8V	Delay Time: 1~2s
Over Discharge Voltage Protection	Voltage :10V	Delay Time: 1~2s
Temperature Protection	PCB Temperature≥95 °C Recover≤85 °C	
Communication Port	No	



SWLFP-121000(12.8V100Ah)


Constant Current Discharge Data (Amperes @ 25°)

Discharge Time	1h	2h	3h	4h	5h	10h	20h
Cut off voltage (10.8V)	100A	50A	33.4A	25A	20A	10A	5A


Constant Power Discharge Data (Watts @ 25°C)

Discharge Time	1h	2h	3h	4h	5h	10h	20h
Cut off voltage (10.8V)	1280W	640W	426.7W	320W	256W	128W	64W


Discharge characteristics (25°C)

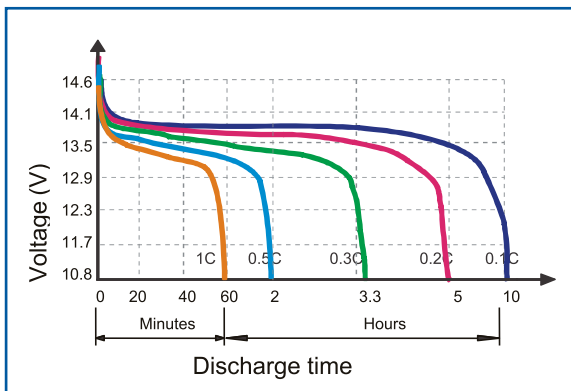


Different Temperature Discharge Curve (0.5C)

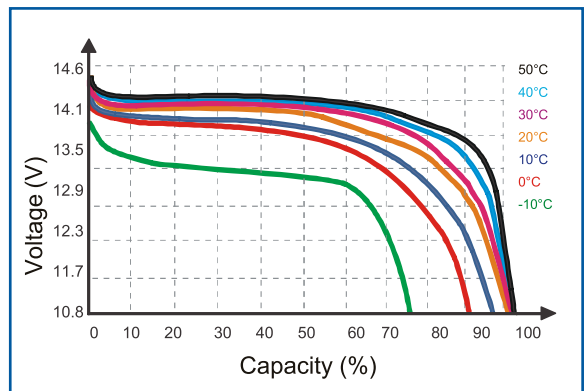

Different DOD Discharge cycle life Curve 0.2C 25°C

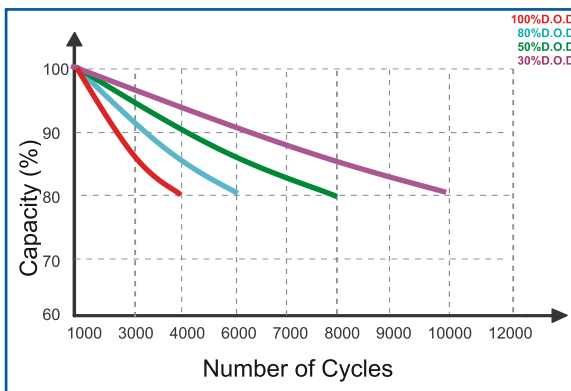

State of Charge Curve (0.5C, 25°C)

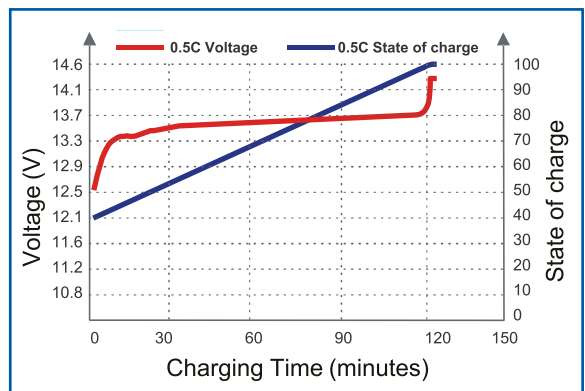

Note 1: Please always refer to the latest edition of our technical manual that published on our website to ensure safe and efficient operation.

Note 2: When make parallel connection, please full discharge batteries, then recharge after parallel connected; when series connect, please keep batteries with same remain capacity/

Note 3: Parallel connection is only for longer backup time, not for larger output power.